

A product of

LEONHARD CONSULTING GmbH
 AV-KONGRESSTECHNIK-ELEKTROAKUSTIK
 SCHWEIZ SUISSE SWITZERLAND

SIPROT®

**The modern PROTOKOL MANAGEMENT System
 CONNECTION BOX 9550ZFB-2 Set**

The 9550ZFB connection box is used for audio transmission from the SIPROT analogue interface to the recording device. With the headphone you can check the signal quality. With the built-in switch you can check the SIPROT output and the input of the recording unit.

Dimensions
 L = 83mm
 B = 43mm
 H = 27mm
 Set weight 105g
 (incl. cable)

Cable 4 x 0.4mm

Case black

**The sound transmission
 SIPROT line out to
 the recording device is
 switchable:
 Microphone level
 or line level**

Connections from the SIPROT system to recording systems (notebooks, Computer, digital recorder, etc.) often problems. The best microphone system will not help if the recording of sound from the SIPROT system is not possible. For our customers, we have made some studies regarding sound transmission technology. They were the foundations for the construction of our new connection box 9550ZFB. The connection box 9550ZFB contains both the recording connection to the recording system, as well as a connection of headphones of the latest generation. Headphones makes it possible to check the sound quality from the SIPROT system and the recording system.

Available as an option on request



Connection adapter headphone
 Jack 3.5 mm 3 pol. Plug on 4-pin socket




Connection adapter headphones
 Jack 3.5 mm 4 pol. Masc. to 3 pol. Fem

RECORD SIGNAL ADJUSTMENT

This switch only needs to be set when setting up the system the first time.
 Do not adjust afterwards.

Use this slide switch to check the recording quality, aux output SIPROT system, and the recording system.

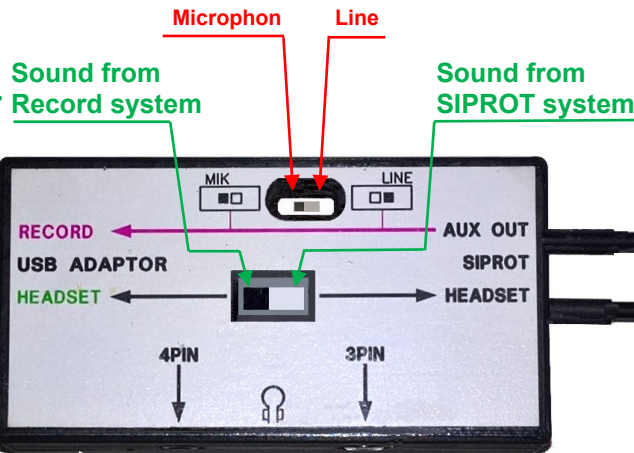

**Connection from
 USB
 Adaptor**


**Control
 sound quality
 with
 headphones**

**Connection from
 SIPROT
 Analog Interface**

Please note:
 The connection box is intended for a USB input on the notebook. This requires a USB adapter with sound card.
 See the installation information on the page E13.

Installation CONNECTION BOX 9550ZFB-2

This connection technology is recommended for a professional, good, uncomplicated transmission of the analog audio signal from the SIPROT system to a digital one Recording device (notebook, digital recorder, etc.). Most of these devices have a USB-2 port.

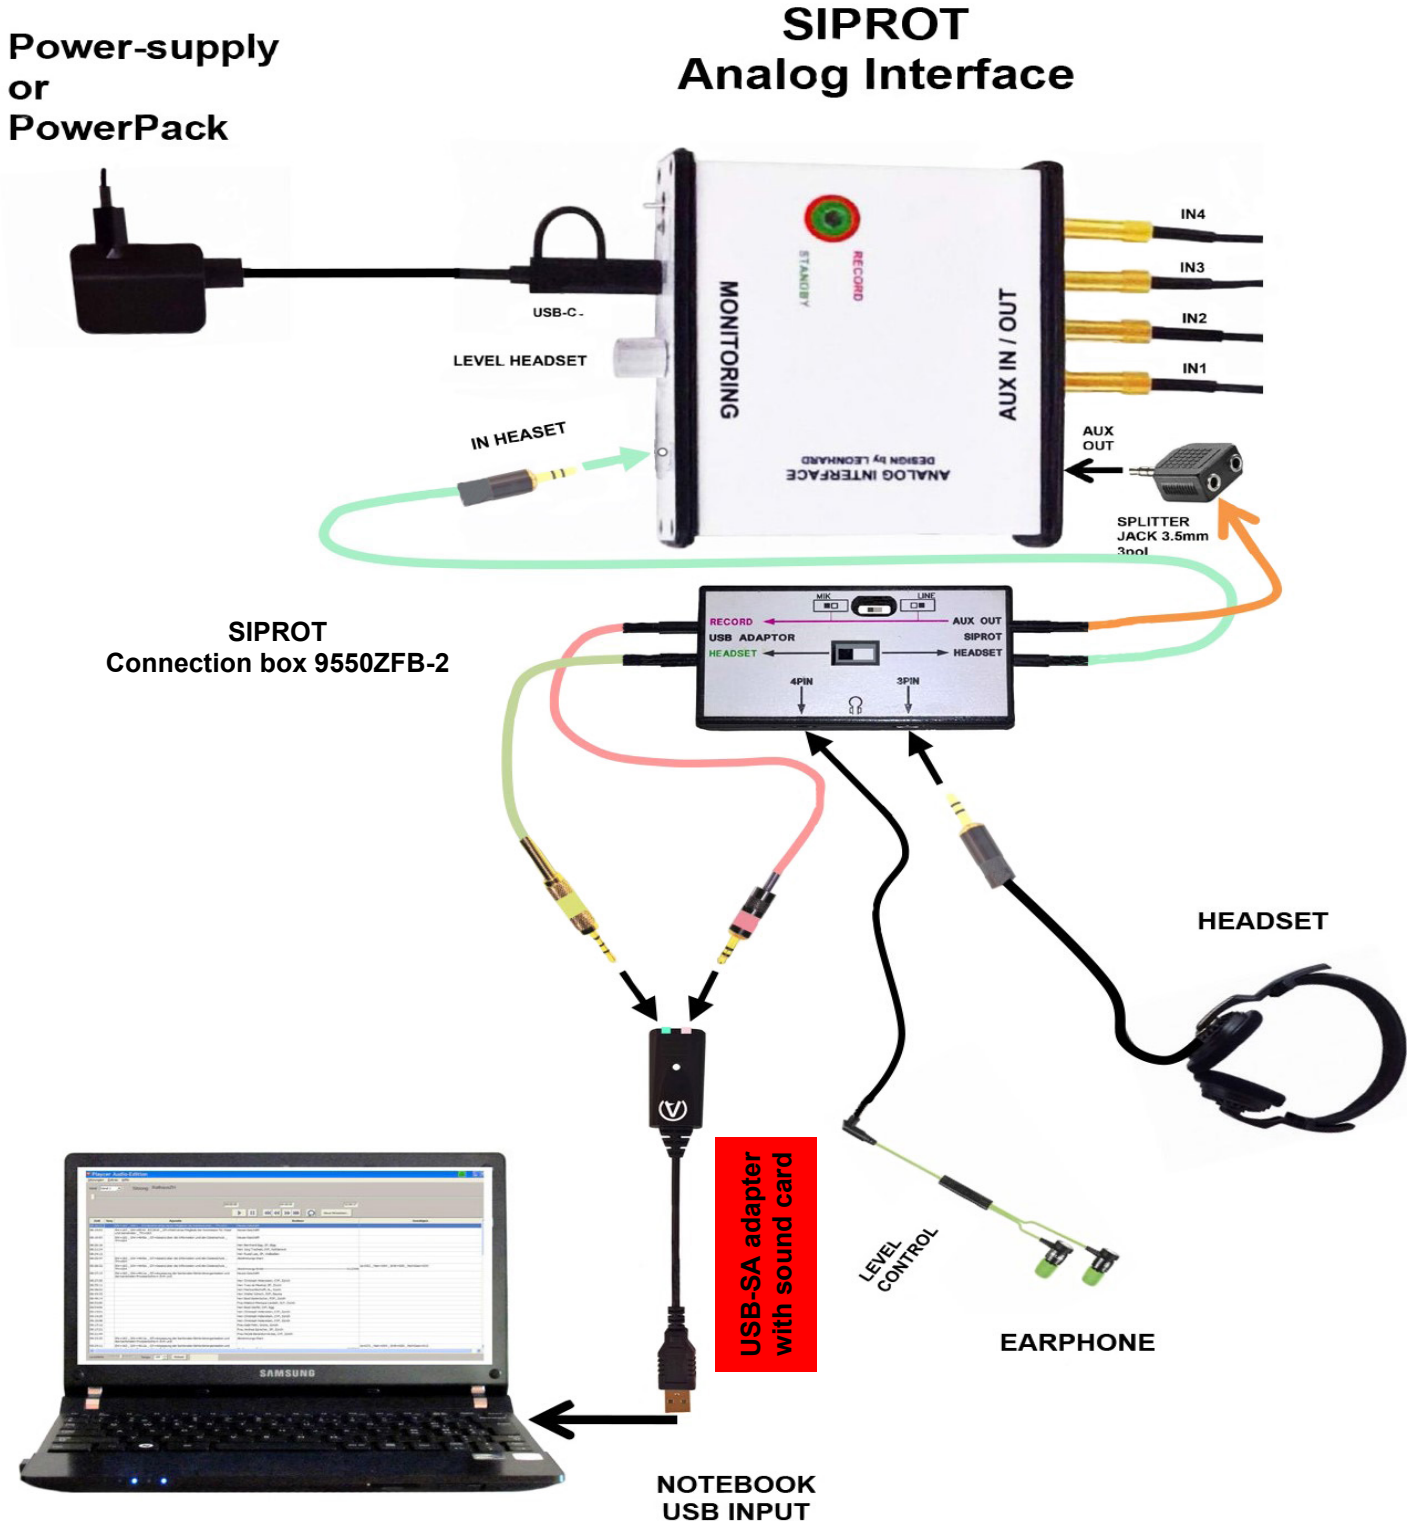

Recommended USB adapters with sound card from manufacturer:
www.andreacommunication.com
 USB-SA External Premium Stereo soundcard Price US \$ 45
www.hama.com
 USB Sound Card 7.1 SURROUND Price € 25-30