A product of

LEONHARD CONSULTING GmbH AV-KONGRESSTECHNIK-ELEKTROAKUSTIK SCHWEIZ SUISSE SWITZERLAND

SIPROT®

The modern one PROTOKOLLMANAGEMENT System

CONNECTION CABLE 9550ZFA-3

With the development of the connection cable series 9550ZFA, we have various possibilities of non-active level adjustments in audio systems available. The basic print is designed so that in most requirements, fitting circuits for our customers are available at short notice, professionally and cost-effectively.

The connection cable ZFA-3 will be use for audio transmission from an external audio player to a BUS input from the SIPROT analogue interface. This gives you the opportunity to record tex, music, sounds etc. in the log.

Standard settings on delivery = -20dB to -40dB adjustable

Dimensions

L = 5.0 cm

B = 2.5cm

H = 2.6cm

Weight

55 g

(including cable)

cable length 2 x 1m

Case blue

* Jack 3,5 mm 3 Pin. Connection cable Audio IN from Audio ext. device AUX OUT


* for connections
with
XLR
Plug types
are optional
adaptor cable
available
types:
9550ZFA-3-1
or

9550ZFA-3-2

CONECTION CABEL
LC 9550ZFA-3

Jack 3.5 mm 3 pol.
Sound signal OUT
to the
SIPROT-analog-interface
MIK.- BUS - IN

Output level controle range = 20dB

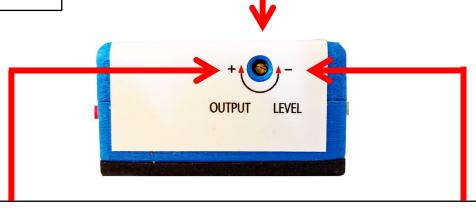

Smaller level adjustments are possible with the externally accessible trim control.

Examples: a.) If the recording is distorted, turn the trim control a bit towards direction + (attenuation greater).

b.) If you have too little level, turn the trim control towards - (attenuation less).

Caution: Carefully turn the trim regulator only in small steps (rotation angle approx. 1-3 mm).

A product of

LEONHARD CONSULTING GmbH AV-KONGRESSTECHNIK-ELEKTROAKUSTIK SCHWEIZ SUISSE SWITZERLAND

SIPROT® The modern one PROTOKOL MANAGEMENT System ADAPTOR CABLE for 9550ZFA-3

CONNECTORS: XLR-3pol-fem – Jack 3.5mm, 3pol-fem cable length 20cm

