

A product of

LEONHARD CONSULTING GmbH
AV-KONGRESSTECHNIK-ELEKTROAKUSTIK
SCHWEIZ SUISSE SWITZERLAND

SIPROT®

The modern one PROTOKOL MANAGEMENT System
CONNECTION CABLE 9550ZFA-2

With the development of the connection cable series 9550ZFA, we have various possibilities of non-active level adjustments in audio systems available. The basic print is designed so that in most requirements, fitting circuits for our customers are available at short notice, professionally and cost-effectively.

Dimensions

L = 5.0 cm
B = 2.5cm
H = 2.6cm
Weight 55g
(including cable)

The ZFA-2 connection cable will be use for audio transmission from the SIPROT analogue interface to the microphone input of the recording device.

cable length
2 x 1m

Standard setting on delivery = - 30dB

Case
red


As a replacement for this cable connection, an other headphone and recording connections is available. see Type 9550ZFB-1 details are on pages E12 and E13

Jack 3.5 mm 3 pol.
Line connection
Audio IN
from
AUX OUT of the
Analog interface



Jack 3.5 mm 3 pol.
Sound signal OUT
to the
recording apparatus
Microphone IN

Output level control range
= 20dB

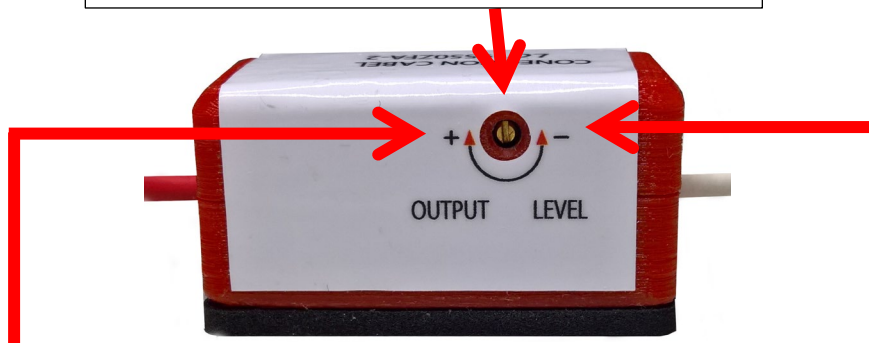

Smaller level adjustments are possible with the externally accessible trim control.

Examples: a.) If the recording is distorted, turn the trim control a bit towards direction + (attenuation greater).
b.) If you have too little level, turn the trim control towards - (attenuation less).

Caution: Carefully turn the trim regulator only in small steps (rotation angle approx. 1-3 mm).

Installation notes
see next page E11a

E11

Analog Interface

